

LED Intelligent Dimming Driver


75W 3.12A 24V DC

- Dimming interface: 1-10V [0-10V/10VPWM/resistor], Push Dim.
- PWM digital dimming, no alter LED color rendering index.
- High frequency PWM dimming, no flicker in video camera.
- Dimming range from 0-100%, LED start at 0.1% possible.
- Power factor > 0.99, Efficiency > 87%.
- Short circuit / Over-heat / Over load / Over Voltage protection.
- Compliant with Safety Extra Low Voltage standard.
- Suitable for indoor environments.




SELV

1-10V Connection

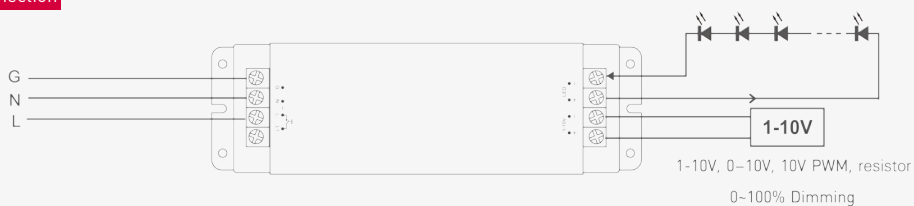

Push Dim Connection

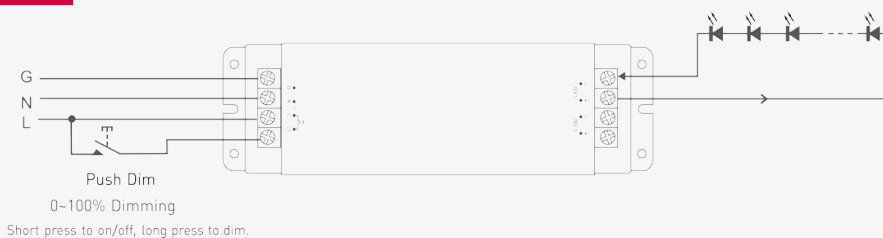

The dimming interface priority: First 1-10V, next Push Dim.

Push Dimming



Reset Switch

- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the light level goes to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning off and on again.